


6 GHz, SMA-Male to BNC-Bulkhead, 20 cm flexible cable.



RoHS compliant

Features

- 0.7 dB insertion loss at 6 GHz.
- Heavy-duty BNC connector, with BeCu center contact.
- Perfect fit for the HPO-030 or HPO-080 options.

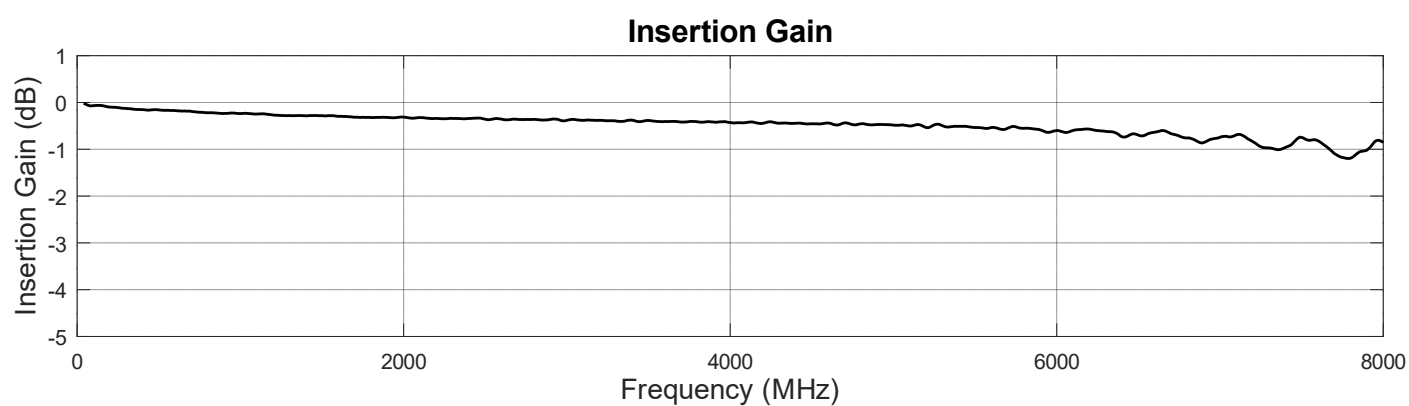

Materials and Finishes

BNC Connector

Description	Material	Finish
Body, Nut, Wahser	Brass	Nickel plated
Center contact	BeCu	Gold plated
Dielectric	PTFE	
O-Ring	Silicone rubber	

SMA Connector

Description	Material	Finish
Body	Brass	Gold plated
Coupling Cap	Brass	Gold plated
Center contact	Brass	Gold plated
Dielectric	PTFE	

Notes:

- 1). Unless otherwise stated, all specifications are nominal.
- 2). The information contained in this document is accurate to the best of our knowledge. We reserve the right to update it, with new information or corrections, without notice.