


10 GHz, SMA-Male to SMA-Male, 20 cm flexible cable.



RoHS compliant

Features

- 0.6 dB insertion loss at 10 GHz.
- Perfect fit for the HPO options in conjunction with the SMA-BBLK-2.

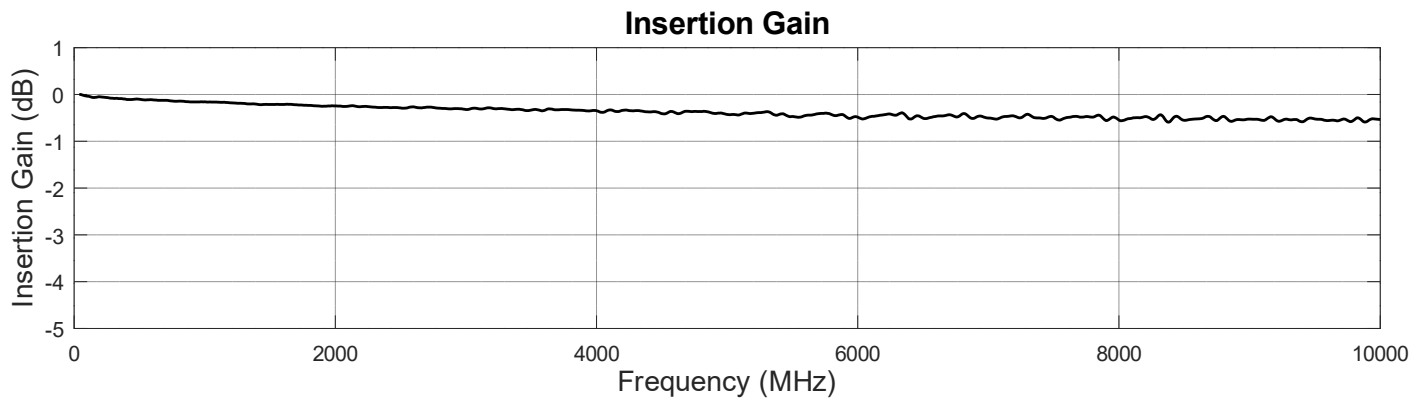

Materials and Finishes

SMA Connector

Description	Material	Finish
Body	Brass	Gold plated
Coupling Cap	Brass	Gold plated
Center contact	Brass	Gold plated
Dielectric	PTFE	

Notes:

- 1). Unless otherwise stated, all specifications are nominal.
- 2). The information contained in this document is accurate to the best of our knowledge. We reserve the right to update it, with new information or corrections, without notice.